


Tasselli per cave (DIN 508)

ACCIAIO: C 45
LUNGHEZZA BARRE: 3-4 MT

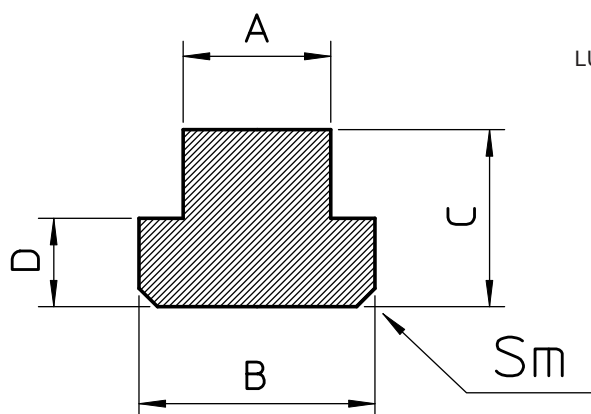

| NR. PROF. | DIMENSIONI mm | | | | PESO KG/MT | TOLLERANZE mm | | | | Sm 45° |
|--------------|------------------|----|----|----|---------------|--------------------|-----------------|-----------------|-----------------|-----------|
| | A | B | C | D | | A | B | C | D | |
| 0819 | 5,7 | 10 | 8 | 4 | 0,482 | -0 $-0,15$ | $+0$ $-0,50$ | $\pm 0,20$ | $+0$ $-0,50$ | 1,6 |
| 0820 | 8 | 13 | 10 | 6 | 0,845 | $-0,30$ $-0,50$ | $+0$ $-0,50$ | $\pm 0,20$ | $+0$ $-0,50$ | 1,6 |
| 0796 | 9,7 | 15 | 12 | 6 | 1,150 | -0 $-0,20$ | $+0$ $-0,50$ | $\pm 0,20$ | $+0$ $-0,50$ | 1,6 |
| 0821 | 12 | 18 | 14 | 7 | 1,600 | $-0,30$ $-0,55$ | $+0$ $-0,50$ | $\pm 0,20$ | $+0$ $-0,50$ | 2,5 |
| 0827 | 14 | 22 | 16 | 8 | 2,200 | $-0,30$ $-0,55$ | $+0$ $-0,45$ | $\pm 0,20$ | $+0$ $-0,50$ | 2,5 |
| 0135 | 16 | 25 | 18 | 9 | 2,882 | $-0,30$ $-0,60$ | $+0$ $-0,50$ | $\pm 0,20$ | $+0$ $-0,50$ | 2,5 |
| 0136 | 18 | 28 | 20 | 10 | 3,597 | $-0,30$ $-0,45$ | $+0$ $-0,50$ | $\pm 0,20$ | $+0$ $-0,50$ | 2,5 |
| 0822 | 20 | 32 | 24 | 12 | 4,882 | $-0,30$ $-0,60$ | $+0$ $-0,50$ | $\pm 0,20$ | $+0$ $-0,50$ | 2,5 |
| 0823 | 21,5 | 36 | 28 | 14 | 6,250 | $+0,15$ -0 | $+0$ $-0,39$ | $+0$ $-0,52$ | $+0$ $-0,52$ | 3,0 |
| 0824 | 21,6 | 35 | 28 | 14 | 6,170 | $+0$ $-0,1$ | $+0$ $-0,50$ | $\pm 0,20$ | $+0$ $-0,50$ | 2,5 |
| 0912 | 28 | 44 | 36 | 18 | 9,850 | $-0,30$ $-0,60$ | $+0$ $-1,00$ | $\pm 0,30$ | $+0$ $-1,00$ | 4,0 |