


TASSELLI PER CAVE

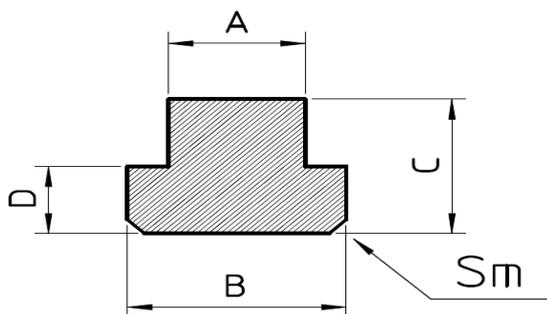

N° PROF. SIPA	DIMENSIONI (mm)				Sm 45°	TOLLERANZE (mm)				Kg/m (acciaio UNI)
	A	B	C	D		A	B	C	D	
820	8	13	10	6	1.6	-0.30	+0.00	+0.20	+0.00	0.845
						-0.50	-0.50	-0.20	-0.50	
796	9,7	15	12	6	1.6	-0.00	+0.00	+0.20	+0.00	1.150
						-0.20	-0.50	-0.20	-0.50	
821	12	18	14	7	2.5	-0.30	+0.00	+0.20	+0.00	1.600
						-0.55	-0.50	-0.20	-0.50	
827	14	22	16	8	2.5	-0.30	+0.00	+0.20	+0.00	2.200
						-0.55	-0.45	-0.20	-0.50	
135	16	25	18	9	2.5	-0.30	+0.00	+0.20	+0.00	2.882
						-0.60	-0.50	-0.20	-0.50	
136	18	28	20	10	2.5	-0.30	+0.00	+0.20	+0.00	3.597
						-0.45	-0.50	-0.20	-0.50	
822	20	32	24	12	2.5	-0.30	+0.00	+0.20	+0.00	4.882
						-0.60	-0.50	-0.20	-0.50	
823	21.5	36	28	14	3.0	+0.15	+0.00	+0.00	+0.00	6.250
						-0.00	-0.39	-0.52	-0.52	
824	21.6	35	28	14	2.5	+0.00	+0.00	+0.20	+0.00	6.170
						-0.10	-0.50	-0.20	-0.50	
912	28	44	36	18	4.0	-0.30	+0.00	+0.20	+0.00	9.850
						-0.60	-1.00	-0.20	-1.00	